

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 July 2004 (08.07.2004)

PCT

(10) International Publication Number
WO 2004/057394 A1

(51) International Patent Classification⁷: G02B 6/16,
6/20, 6/12, C03B 37/012

(21) International Application Number:
PCT/GB2003/005673

(22) International Filing Date:
22 December 2003 (22.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

0229826.3	20 December 2002 (20.12.2002)	GB
0302632.5	5 February 2003 (05.02.2003)	GB
0306593.5	21 March 2003 (21.03.2003)	GB
0306606.5	21 March 2003 (21.03.2003)	GB
0314485.4	20 June 2003 (20.06.2003)	GB

(71) Applicant (for all designated States except US):
BLAZEPHOTONICS LIMITED [GB/GB]; Finance

(72) Inventors; and


(75) Inventors/Applicants (for US only): **WILLIAMS, David, Philip [GB/GB]**; Flat 7, 27 Marlborough Buildings, Bath BA1 2LY (GB). **MANGAN, Brian, Joseph [GB/GB]**; 20 Prior Park Road, Bath BA2 4NG (GB). **RUSSELL, Philip, St. John [GB/GB]**; Shepherds Mead, Southstoke, Bath BA2 7EB (GB).

(74) Agent: **CRITTEN, Matthew, Peter; Abel & Imray, 20 Red Lion Street, London WC1R 4PQ (GB)**.

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,

[Continued on next page]

(54) Title: PHOTONIC BANDGAP OPTICAL WAVEGUIDE

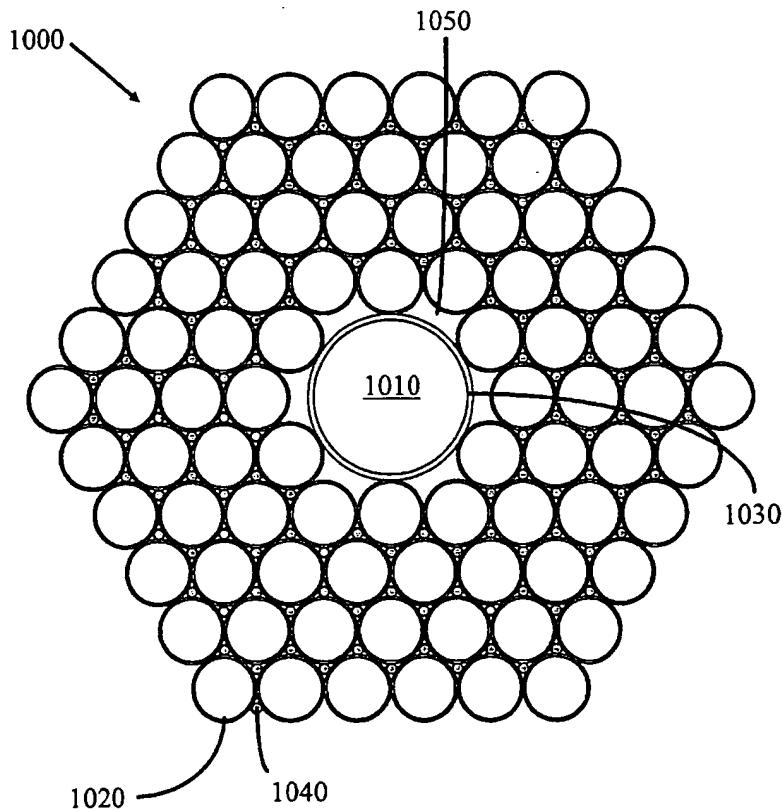

(57) Abstract: Novel preforms and methods of making novel preforms are described. The preforms are suitable for being drawn into photonic bandgap optical fibres. In one form, the preform (1000) comprises a stack of elongate members comprising, in transverse cross section, a triangular close-packed arrangement of circular cross section capillaries (1020), which define interstitial regions containing solid rods (1040). The stack is supported around a relatively large capillary (1030), which defines an inner region of the stack. The stack may be adapted by varying the number of rods in any given interstitial region, in order to generate various different configurations of cladding structure, which can be made into optical fibres having surprising operational characteristics, such as a split bandgap.



SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.